

Distributed by:






www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 222922 (207463-1)

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
BD	48							
					A2	REV. & REDRAWN ECN-1119	7-18-85	SW
					B	REVISED PER ECN BD6802	12/03/92	RM
					B1	ADDED -4 PER NPR 4855	07/07/93	SB
					C	OBS -4 PER EC 0420-141-96	17 SEPT 97	SB

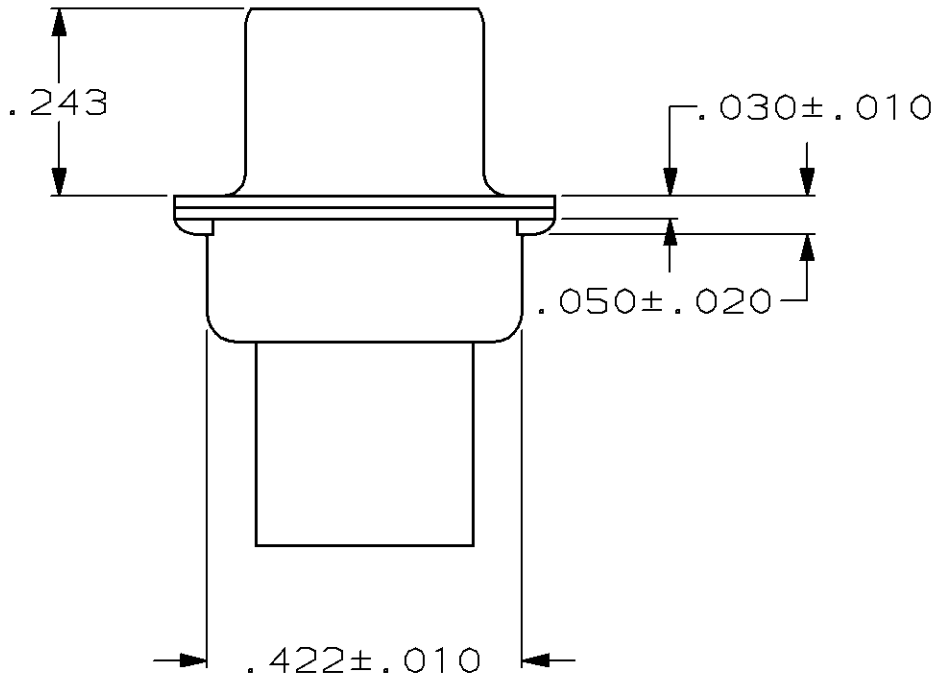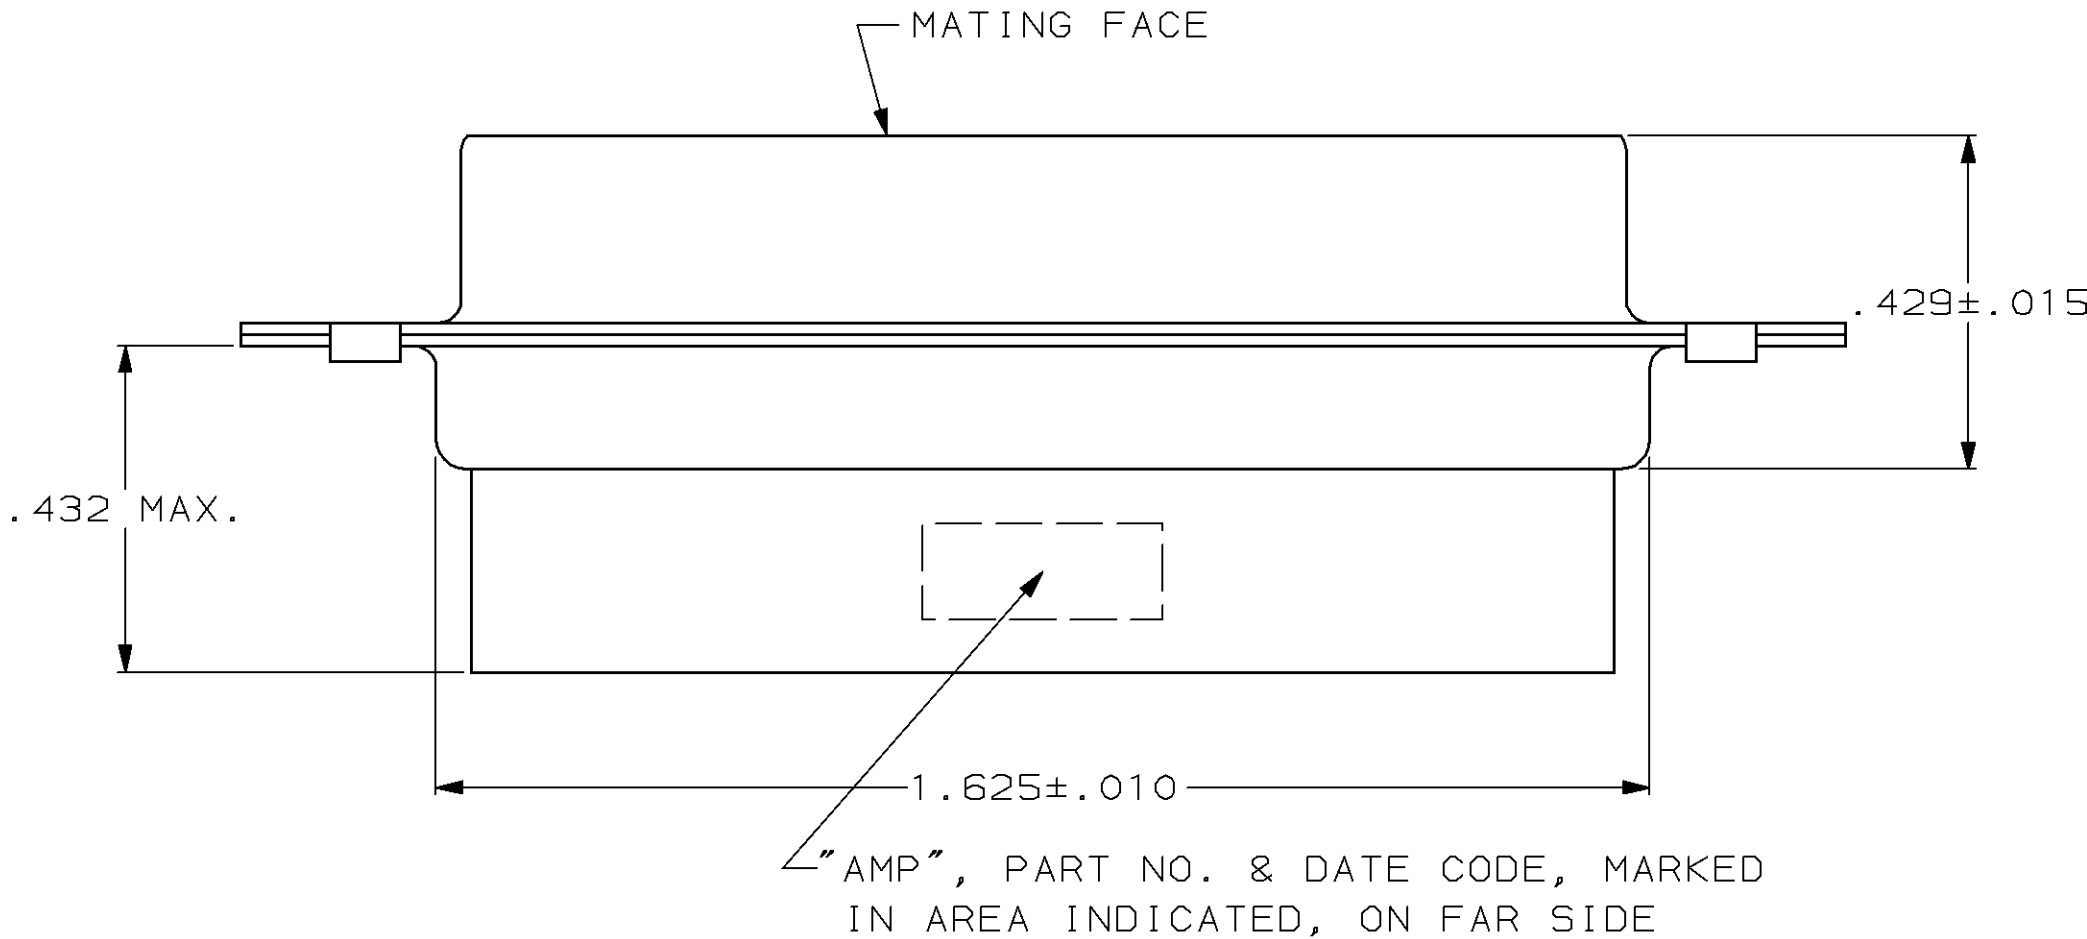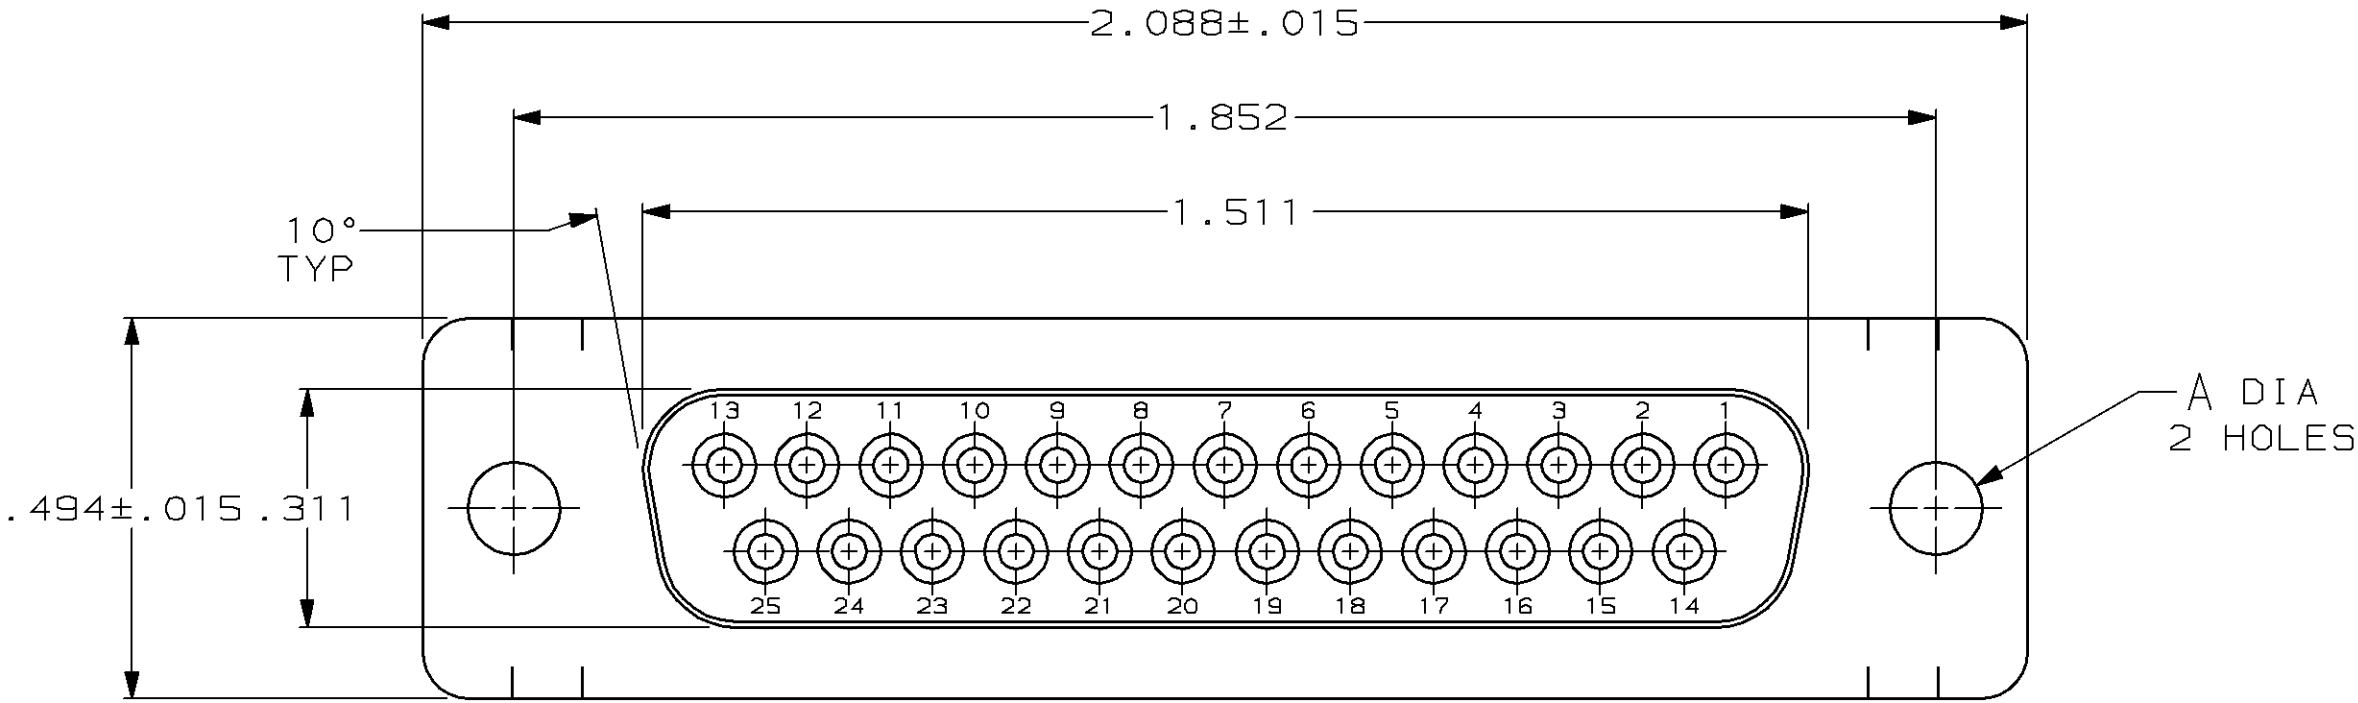

- CONNECTOR ACCEPTS SIZE 20 DF SOCKET CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- CONNECTOR COMPLIES WITH 108-40005 WHERE APPLICABLE.
- NYLON, FLAME RETARDANT, 94V-0 RATED, GLASS FILLED, BLACK.
- STEEL PER ASTM A109.
- TIN OR TIN-LEAD PLATED PER MIL-T-10727.
- TIN PLATED PER MIL-T-10727 OVER COPPER PER MIL-C-14550.

OBSOLETE	SMALL PACK	6	.120	207463-4
	STANDARD	5	.154	207463-2
	STANDARD	6	.120	207463-1
	PACKAGING TYPE	SHELL FINISH	A	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± .005 ANGLES ± 2°	DR 7-19-85 S.WELDON CHK 7-29-85 J.GERACE APPD 7-29-85 L.BREKOSKY APPD 7-31-85 V.KUMAR	AMP AMP Incorporated Harrisburg, PA 17105-3608		
MATERIAL MOLDED PARTS: 3 SHELLS: 4	PRODUCT SPEC -	RECEPTACLE CONNECTOR, SIZE 3, 25 POSITION, AMPLIMITE™ HDP		
FINISH SHELLS: SEE TABLE	APPLICATION SPEC -	SIZE C	CAGE CODE 00779	DRAWING NO C=207463
WEIGHT -		SCALE 4:1		SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.